



RAPID ISOPHONIC PIPE CLAMP (M6)

Rapid installation of PVC, Plastic and Copper pipes in light to medium duty applications.


- Choice of close to ceiling, rod suspension or channel mount systems.
- For pipe outer diameters from 12 to 60mm.
- Suits high pressure water, ventilation, gas and drainage pipes.
- Sound, vibration and electrolysis protection.
- Suits horizontal, vertical and overhead.
- Two piece clamp with quick close mechanism.

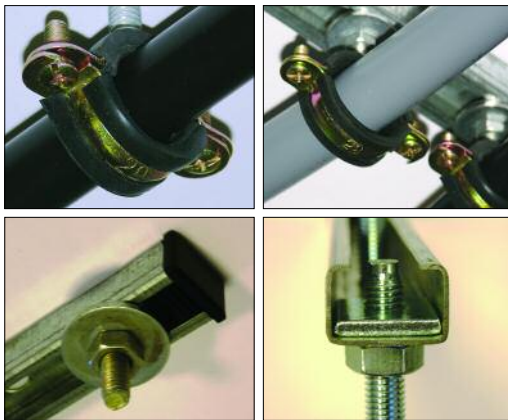

Order No	Pipe Size D ø (OD) (mm)	Material Size (mm) A (wide) x B (thick)	 Order Qty
134012	12	12 x 1.2	100
134016	16	12 x 1.2	100
134020	20	12 x 1.2	100
134026	26	12 x 1.2	100
134032	32	12 x 1.2	50
134035	35	12 x 1.2	50
134042	42	15 x 1.2	50
134054	54	15 x 1.2	25
134060	60	15 x 1.2	25

TECHNICAL DATA

M MATERIAL Yellow Zinc Plate	RUBBER INLAY EPDM	SOUND REDUCTION 12dB(A)	DIMENSION OF SIDE SCREW M5
T TEMPERATURE RESISTANCE -40°C to +110°C	BREAKING LOAD IN TENSION 2000 N (200kg)	SAFE WORKING LOAD IN TENSION 700 N (70kg)	SOUND PROTECTION DIN 4109

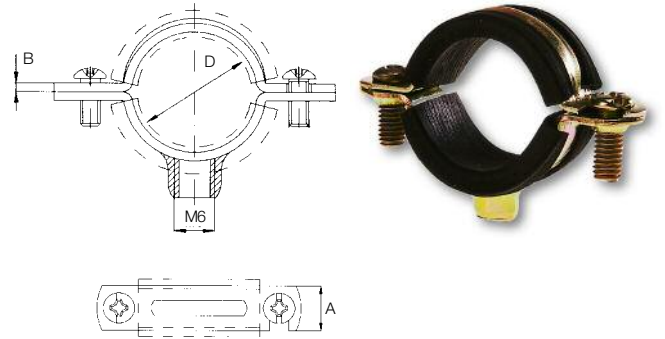

SUGGESTED INSTALLATION METHODS:

Drop-in flanged anchor (M6) with threaded rod pg 56,82,92

- Installs flush with surface for correct pipe alignment.
- Internally threaded anchor. High strength.
- Small hole drilling for fast installation.
- Double thread, short rod (M6/M6) for close to ceiling use.



Perforated Channel with accessories pg 26,54,57,88

- Choice of ceiling, wall and suspension mounting.
- Less fixings, faster clamp installations.
- Compact, high strength channel for multiple fittings.
- Rail bolt connector (M6). Screw-on pipe clamp. Push and twist mechanism to locate bolt. Longitudinal movement along rail.
- Rail plate nut (rectangular, M10). Mount threaded rod to channel. Use with Hex nut/washers.
- Fixed and sliding mount positions.
- Choice of anchoring method:
 - AnkaScrew 5x30mm Hex.
 - Palsa Gas pins with washer assembly.
 - DynaBolt (M6)



Ramset recommends application tests on-site before commencing use.